


DPC

PRODUCT SPECIFICATIONS

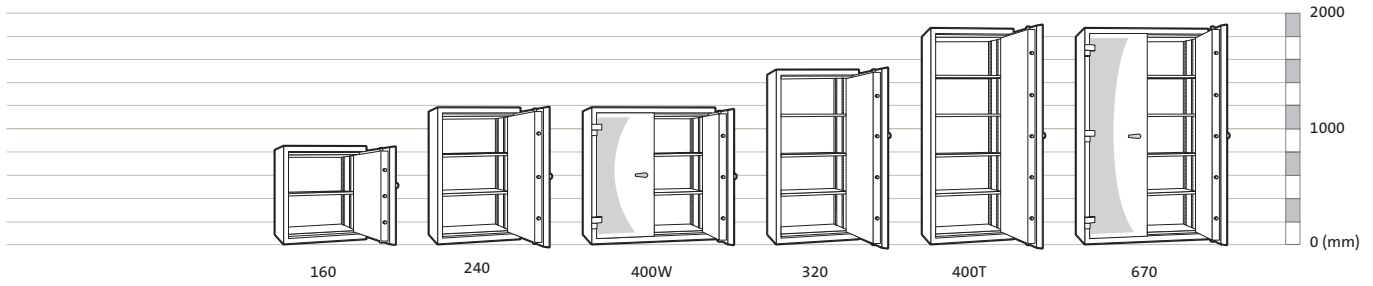

| Model | External Height (mm) | External Width* (mm) | External Depth** (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Volume (Litres) | Weight (kg) | No. of Doors | No. of Shelves |
|-------|----------------------|----------------------|-----------------------|----------------------|---------------------|---------------------|-----------------|-------------|--------------|----------------|
| 240 | 1209 | 759 | 605 | 1050 | 600 | 382 | 240 | 315 | 1 | 2 |
| 400W | 1209 | 1160 | 605 | 1050 | 1000 | 382 | 401 | 500 | 2 | 2 |
| 320 | 1559 | 759 | 605 | 1400 | 600 | 382 | 321 | 395 | 1 | 3 |
| 670 | 1909 | 1160 | 605 | 1750 | 1000 | 382 | 670 | 650 | 2 | 4 |

*Projection of hinge (27mm) not included. **Projection of handle (54mm) not included

LOCK OPTIONS

Fitted with a Mauer 71111A key lock as standard. Dual locking or single electronic or manual combination locks are available at additional costs.

FINISH

- Body & Interior: RAL 7035 Silver Grey
- Facia Panel: RAL 7016 Anthracite Grey
- Handle: Black and Silver
- Escutcheon: Black

RANGE OF CUSTOMISABLE FITTINGS FOR ULTIMATE FLEXIBILITY

A wide variety of optional internal fittings ensures you can customise the cabinet to your specific needs. Each cabinet is equipped with a number of standard shelves (see table above). The underside of each shelf has been developed to allow front loading of A4 filing pockets to be suspended below.

OPTIONAL FITTINGS INCLUDE:

- Adjustable pull-out frames, for a variety of file sizes and orientations
- Lockable cupboards - 300mm high (side by side for double door models)
- Lockable drawers for added security - 80mm high (half width for double door models)
- Pull-out trays for smaller items - 60mm high

TESTING

To ensure you benefit from advanced fire resistance, the DPC range is subjected to an extensive fire testing process that consists of placing the cabinets in a furnace, heating it to a temperature of 1000°C or more for two hours, and analysing the internal temperature both during furnace heating and the cooling down process once the furnace burners have been turned off. In addition, UL also includes the following measures in its fire endurance test to ensure superior resistance:



FURNACE COOLING OR "SOAK OUT"

to replicate the conditions experienced when a fire burns out. After the fire has been extinguished, it is not possible to retrieve your information immediately. Hot rubble continues to heat the cabinet, it is therefore important that your cabinet is designed to withstand such conditions.

RAPID HEATING

to simulate explosion testing at all levels of certification. Rapid heating occurs where fire transits a building quickly so the cabinet can suddenly be subjected to extremely high temperatures. This "explosion" or "shock" test as it is sometimes known, simulates this scenario. Safes not tested in this way may rupture under such conditions leading to loss of contents.

Ph: 1800 450 777

www.chubbsafes.com.au



www.gcsafes.com.au

Chubbsafes
Trusted the world over.